Huddleston Roof Replacement Project Bedford County Public Schools Addendum 1 3/22/24

TO ALL BIDDERS: The following constitutes Addendum No. 1 for the Huddleston Elementary Roof Replacement Project. This addendum shall be attached to the Contract Documents and shall be part thereof to the same extent as if it were originally included. The contractor shall be responsible for coordinating these changes as they affect other work in the Contract Documents.

Bidders shall acknowledge receipt of this addendum on their bid form.

Summary of Changes:

- 1. Replace existing section 000102 TABLE OF CONTENTS with revised section attached.
- 2. Replace existing section 004113 BID FORM with the revised section attached.
- 3. In section 011000 SUMMARY paragraph 1.5 Section A.1, replace paragraph with the following: "Reroofing over existing fully adhered EPDM roofing with new fleecebacked EPDM membrane and removal of existing metal roofing and replacing with a new standing seamed metal roof in the areas identified in the Contract Documents. To also include abatement of areas identified in the Hurt and Proffitt report dated 3/19/24 and included in section 020813"
- 4. In section 012100 ALLOWANCES paragraph 3.3, add the following:

B. Allowance No. 2: Quantity Allowance: Base Bid shall include for 450 sf of abatement of Asbestos-Containing Black Roof Flashing Material per spec section 020813.

C. Allowance No 3: Quantity Allowance: Base Bid shall include for 60 sf of abatement of Asbestos-Containing Black Wall Sealant (Roofing Cement Debris) per spec section 020813

D. Allowance No 4: Quantity Allowance: Base Bid shall include for 70 sf of abatement of Asbestos-Containing Black Parapet Wall Sealant per spec section 020813

5. Add attached section 020813 - ASBESTOS ABATEMENT

DOCUMENT 000102 - TABLE OF CONTENTS

DIVISION 00 – PROCUREMENT AND CONTRACTING REQUIREMENTS

000000 – COVER PAGE 000102 – TABLE OF CONTENTS 001116 – INVITATION TO BID 002513 – PREBID MEETINGS 004113 – BID FORM - STIPULATED SUM (SINGLE-PRIME CONTRACT) 006000 – PROJECT FORMS STANDARD BCPS FORM OF AGREEMENT BETWEEN BCPS AND CONTRACTOR BCPS STANDARD TERMS AND CONDITIONS – EXHIBIT A BCPS STANDARD NOTES

DIVISION 01 – GENERAL REQUIREMENTS

- 011000 SUMMARY
- 012100 ALLOWANCES
- 012200 UNIT PRICES
- 013100 PROJECT MANAGEMENT AND COORDINATION
- 013300 SUBMITTAL PROCEDURES
- 017300 EXECUTION
- 017419 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
- 017700 CLOSEOUT PROCEDURES
- 017823 OPERATION AND MAINTENANCE DATA

DIVISION 02 - EXISTING CONDITIONS

020813 - ASBESTOS ABATEMENT

mmm

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

070150.19 - PREPARATION FOR REROOFING 074113.16 - STANDING SEAM METAL ROOF PANELS 075323 - EPDM FULLY ADHERED ROOFING

END OF DOCUMENT 000102

DOCUMENT 004113 - BID FORM - STIPULATED SUM (SINGLE-PRIME CONTRACT)

1.1 BID INFORMATION

- A. Bidder: _____
- B. Project Name: Huddleston Elementary Roof Replacement
- C. Project Location: 1027 Huddleston Dr, Huddleston, VA 24104
- D. Owner: Bedford County Public Schools.

1.2 CERTIFICATIONS AND BASE BID

A. Base Bid, Single-Prime (All Trades) Contract: The undersigned Bidder, having carefully examined the Procurement and Contracting Requirements, Conditions of the Contract, Drawings, Specifications, and all subsequent Addenda, having visited the site, and being familiar with all conditions and requirements of the Work, hereby agrees to furnish all material, labor, equipment and services, including all scheduled allowances, necessary to complete the construction of the above-named project, according to the requirements of the Procurement and Contracting Documents, for the stipulated sum of:

1.	Dollars (\$).

Bedford County Public Schools Huddleston Elementary Roof Replacement

1.3 ALLOWANCE/UNIT PRICE SUMMARY TABULATION

	Description	Unit Price	Allowance Amount	Total
Allowance #1	Replace Insulation	per sqft	1,400 sqft.	
\sim	\sim			
Allowance #2	ACM Black Roof Flashing Abatement	per sqft	450 sqft	
Allowance #3	ACM Black Wall Sealant Abatement (Brick)	per sqft	60 sqft	
Allowance #4	ACM Black Wall Sealant Abatement (Parapet)	per sqft	70 sqft	
Allowance #5	ACM Chimney Flashing Abatement	per sqft	7 sqft	
Unit Price #1	Wood Nailer Replacement	per linear foot	Unit Price Only	######
Unit Price #2	Steel Deck Surface Rust Repair	per sqft	Unit Price Only	######
Unit Price #3	Steel Deck infill	per sqft	Unit Price Only	#####

1.4 BID GUARANTEE

A. The undersigned Bidder agrees to execute a contract for this Work in the above amount after a written Notice of Award, if offered within 60 days after receipt of bids

1.5 TIME OF COMPLETION

A. The undersigned Bidder proposes and agrees hereby to commence the Work of the Contract Documents on a date specified in a written Notice to Proceed to be issued by the Owner, and shall fully complete the Work as specified in Section 001116.

1.6 SUBCONTRACTORS AND SUPPLIERS

A. The following companies shall execute subcontracts for the portions of the Work indicated:

1.7 ACKNOWLEDGEMENT OF ADDENDA

A. The undersigned Bidder acknowledges receipt of and use of the following Addenda in the preparation of this Bid:

- 1. Addendum No. 1, dated ______.
- 2. Addendum No. 2, dated ______.
- 3. Addendum No. 3, dated ______.
- 4. Addendum No. 4, dated ______.

Bedford County Public Schools Huddleston Elementary Roof Replacement

1.8 SUBMISSION OF BID	
A. Respectfully submitted this _	day of, 2024.
B. Submitted By:	(Name of bidding firm
or corporation).	
C. Authorized Signature:	(Handwritten
signature).	
	(Type or print
name).	
	(Owner/Partner/President/Vice
President).	
F. Witnessed By:	(Handwritten
signature).	
	(Handwritten
signature).	
	(Type or print
name).	
I. Title:	(Corporate Secretary or Assistant
Secretary).	
J. Street Address:	
K. City, State, Zip:	
L. Phone:	
M. License No.:	
N. Federal ID No.:	(Affix Corporate Seal Here).

END OF DOCUMENT 004113

ASBESTOS ABATEMENT DESIGN

March 22, 2024

Huddleston Elementary School

1027 Huddleston Drive Huddleston, Virginia 24104



H&P PROJECT NO. 20240358

SUBMITTED TO: Bedford County, VA Public Schools 310 South Bridge Street Bedford, Virginia 24523

PREPARED BY:

Brian J. Trent Environmental Project Manager VA Asbestos Project Designer: 3305001411

5 Fronis Wood

Travis J. Wood Environmental / IH Project Manager VA Asbestos Project Designer: 3305001380

2524 Langhorne Road | Lynchburg, VA 24501 (434) 847-7796 | www.HandP.com





Introduction

This asbestos abatement design has been written in accordance with local, state, and federal regulations/guidelines for the safe handling / removal of asbestos-containing materials in association with proposed roof replacement activities at the *Huddleston Elementary School Facility* located at 1027 Huddleston Drive in Huddleston, Virginia 24104. This design is for the explicit use of *Bedford County, Virginia Public Schools* and their chosen asbestos abatement contractor(s) and was written to aid *Bedford County, Virginia Public Schools* accomplish the safe removal of asbestos-containing materials in preparation of roof replacement activities.

The following will apply at all times for each portion of the asbestos removal process for all parts herein:

Code of Federal Regulation

- OSHA 29 CFR Part 1910.134-Respiratory Protection
- OSHA 29 CFR Part 1910.145-Accident Prevention
- OSHA 29 CFR Part 1926.1101–Asbestos Contractor
- OSHA 29 CFR Part 1910.1200-Hazard Communications
- USEPA 40 CFR Part 61-Asbestos National Emission Standards for Hazardous Air Pollutants
- USEPA 40 CFR Part 763-Asbestos Abatement Projects Rule
- USEPA Asbestos Hazard Emergency Response Act (AHERA)

Virginia Administrative Codes and Regulations

- VSWMR 9 VAC 20-80-640-Disposal of Special Waste
- VA DOLI-Title 40.1-Chapter 1-Department of Labor and Industry (40.1 thru 40.1-11.1)
- VA DOLI-Title 40.1-Chapter 3-Protection of Employees (40.1-22 thru 40.1-51.4:5)
- VA DOLI-Title 40.1-Chapter 3.2-Asbestos Notification (40.1-51.20 thru 40.1-51.22)
- VA DOLI-Title 40.1-Chapter 3.3-Virginia NESHAP Act (40.1-51.23 thru 40.1-51.41)
- Virginia Solid Waste Management Regulations (VSWMR)- 9-VAC-20-80-200, VSWMR-9 VAC 20-80-640
- Department of Professional and Occupational Regulation- Virginia Asbestos Regulation Part I 18VAC15 20-10-880

This design is based upon the *Roofing System Asbestos-Containing Material Inspection*, performed by Hurt & Proffitt, dated March 19, 2024 (enclosed). The asbestos abatement must be performed prior to asbestos-containing material disturbance.

The Contractor will perform each task within this design in accordance with Federal and State regulations, at all times.



Asbestos Abatement Design Huddleston Elementary School – Roof Replacement 1027 Huddleston Drive; Huddleston, Virginia 24104

This asbestos-containing materials abatement protocol must be followed prior to the proposed roof replacement associated with the *Huddleston Elementary School Facility*.

Scope of Work:

Appropriate removal and disposal of the following asbestos-containing building materials prior to proposed material disturbance / roof replacement activities:

Material	Location	Quantity
Asbestos-Containing Black Roof Flashing Material	Brick Wall System(s), Parapet Wall System(s)	+/- 450 Square Feet (SF)
Asbestos-Containing Black Wall Sealant (Roofing Cement Debris)	Brick Wall System	+/- 60 Square Feet (SF)
Asbestos-Containing Black Parapet Wall Sealant	Parapet Wall System(s)	+/- 70 Square Feet (SF)
Asbestos-Containing Black Chimney Flashing	Chimney Unit, Annex Building	+/- 7 Square Feet (SF)

The abatement shall include all materials, labor, equipment and incidentals for the removal and disposal of all asbestos containing materials referenced above and additional "other" asbestos-containing materials that may not have been identified as part of the original roof inspection but may be encountered during renovation or during the asbestos abatement activities as addressed within this specification.

The Contractor shall have a Competent Person/Supervisor present at all times when work on this contract is in progress. The Competent Person/Supervisor shall be thoroughly familiar and experienced with asbestos removal and related work and shall be familiar with and shall enforce the use of all safety procedures and equipment. He or She shall be knowledgeable of all EPA, OSHA, and Virginia requirements and guidelines.

Notifications:

The Virginia Department of Labor and Industry (VA DOLI) *Asbestos Notification and Permit Program* regulations require written notification by licensed asbestos abatement contractors for any asbestos abatement project that is at least ten (10) linear feet (LF) or ten (10) square feet (SF); <u>notification is not</u> required for non-friable asbestos-containing roofing, flooring, or siding materials which when installed, <u>encapsulated</u>, or removed do not become friable. The asbestos abatement contractor or facility owner must submit an *Asbestos Notification of Demolition and Renovation Form* to the VA DOLI along with the appropriate fees within at least twenty (20) calendar days prior to the scheduled asbestos removal activity or renovation start date by certified mail or hand delivery. Notifications should be sent to the following:



Asbestos Program Virginia Department of Labor and Industry Powers-Taylor Building 13 South Thirteenth Street Richmond, Virginia 23219

Additionally, the United States Environmental Protection Agency (US EPA) must be notified for any asbestos projects that are at least one-hundred and sixty (160) square or two-hundred and sixty (260) linear feet and for all demolition/renovation projects (where a load-bearing component is removed), regardless of whether asbestos-containing materials are present in the structure or facility. Notifications required by the US EPA must be sent to the Department as described above, except the notification period is ten (10) working days. NESHAP required notifications must be mailed to the US EPA at the following address:

Asbestos Coordinator US EPA Region III Mail Code 3LC62 1650 Arch Street Philadelphia, Pennsylvania 19103

The Contractor shall notify the appropriate agencies of the asbestos removal project, if required. Copies of the written notification shall be available to the Owner, as requested. The Contractor shall secure or confirm all necessary building and asbestos permits as required by state and/or local building codes.

Worker PPE:

Asbestos-trained personnel entering each regulated work area will don the following Personal Protective Equipment (PPE):

- 1. Disposable suits, Tyvek [®] or equivalent, which will include a hood and foot covering
- 2. Powered Air Purifying Respirators (PAPRs) or half (½) face respiratory protection with P-100 filter cartridges
- 3. Safety glasses will be worn with half (½) face respirators
- 4. Rubber disposable gloves or equivalent for tasks to be performed
- 5. Hard hats
- 6. Rubber disposable foot coverings (while performing abatement activities on slippery surfaces, i.e.: asbestos-containing flooring mastic removal)

All asbestos abatement activities will be performed by Virginia Department of Professional and Occupational Regulation (VA DPOR) licensed asbestos abatement supervisors and workers. Each worker will comply with all applicable United States Environmental Protection Agency (US EPA), United States Occupational Safety and Health Administration (US OSHA) and State of Virginia regulations.



Execution:

Work practices conducted on-site shall be in strict compliance with this project design specification, state, federal, and local regulations. When conflicts occur between the project design documents and applicable state, federal, and/or local regulations, the most stringent course of action shall apply.

Set-up:

Prior to asbestos abatement activities the following will be performed:

- Establish the regulated work area: "Danger Asbestos Caution" tape will be strung in place outside of the working area(s) during abatement activities until required clearance and/or reoccupancy has been allowed through visual inspection by the Project Monitor/Inspector. Further, the Contractor shall post all OSHA and US EPA documents and approved warning signs, at a minimum, and provide any physical barriers required to protect equipment as well as the work area from being entered by unauthorized person(s).
- 2. A disposable drop cloth, constructed of 6 mil polyethylene sheeting, will be required within the regulated work area(s), as applicable.
- 3. The decontamination unit(s) shall be located at the entrance to the work area, which may be located at the base of ladders and/or equipment to access the roof from the exterior of the facility. Only one primary means of ingress shall normally be allowed.
- 4. Asbestos-containing debris (friable or non-friable) encountered during Task 1 will be removed from the planned regulated work area and will be disposed of as required by State and Federal regulations in a licensed landfill, regulated by the Virginia Department of Environmental Quality (VA DEQ).
- 5. After work area isolation, the Contractor, if applicable, shall remove all detachable electrical, heating, ventilation, air-conditioning equipment or ducts, or other items located on or in contact with the asbestos materials (if warranted). These items shall be vacuumed with the HEPA filtered vacuum and wet cleaned, wrapped in 6 mil plastic, and stored in the work area in a secure area. Any items requiring special protection such as corner guards, wall moldings or fixtures shall be thus protected to the satisfaction of the project monitor, however; the protection from damage shall be the sole responsibility of the Contractor.
- 6. Stationary items that cannot be removed from the regulated work area must be covered with a disposable drop cloth, preferably made of fire-retardant reinforced polyethylene sheeting.

Decontamination Chamber: (Class I Abatement Activity):

As applicable, if the asbestos-containing material is deemed friable during removal/abatement, a decontamination enclosure, which meets the requirements of 29 CFR 1926.1101, shall be constructed, where necessary and deemed adequate by the onsite Project Monitor, **prior to the commencement of any work area preparation**.

- 1. The entrance to each regulated work area will be provided with a personnel decontamination chamber with a working shower providing hot and cold water from a portable water heater (as applicable, based upon location).
- 2. Each stage of the decontamination chamber will be separated by an air lock.
- 3. The personnel decontamination unit shall be equipped with one (1) shower per six (6) full shift abatement workers.



- 4. Disposable six (6) mil polyethylene ACM bags will be placed in each dirty room of each three (3) stage decontamination chamber. The bags will be utilized for the disposal of the disposable protective suits worn by each worker as they exit the regulated work area(s).
- 5. Soap will be provided and stored in the shower stage.
- 6. Disposable towels will be provided and placed in the clean room at the shower exit.
- 7. Chairs and/or benches will be provided in the clean room.
- 8. Storage areas will be provided for each worker to store personal items and street clothes.
- 9. Supervisor and worker licenses will be posted near the entrance of the decontamination chamber.
- 10. Only Virginia Department of Professional and Occupational Regulation (VA DPOR) licensed asbestos workers, supervisors, and the contracted (third-party) Project Monitor/Inspector will be allowed to enter the regulated work area through the decontamination chamber.
- 11. The decontamination unit shall be cleaned at the beginning, during, and end of each work shift. Dirt and/or debris in the decontamination unit shall not be permitted.
- 12. Decontamination unit wastewater shall be collected and/or filtered in accordance with Virginia Department of Environmental Quality (VA DEQ) or United States Environmental Protection Agency (US EPA) regulations.

Utilities

The Contractor shall be responsible for coordinating the shutdown of electrical power to each work area(s), i.e.: Lock Out / Tag Out. If the power may not be turned off, all power sources shall be wrapped in three (3) individual layers of fire retardant six (6) mil polyethylene sheeting and labeled "DANGER, LIVE ELECTRIC". Further, the Contractor shall be responsible for the maintenance of all electrical cords and water hoses and keeping them in a secure location to prevent unnecessary tripping hazards.

The Contractor shall be responsible for coordinating any HVAC shutdown and isolation with *Bedford County, Virginia Public Schools* personnel.

General Asbestos-Containing Material Handling Requirements:

The following general guidelines/requirements shall be followed by the Contractor during the performance of the above described scope of work (abatement process):

- 1. Asbestos abatement activities shall be performed utilizing wet methods **ONLY**.
- 2. Dry removal, sweeping, wire brushing, removal methods utilizing pressurized water or air, or other inappropriate asbestos abatement techniques **will not be permitted**.
- 3. Loose asbestos-containing waste shall be immediately bagged and transported to the waste decontamination enclosure. The waste bag shall then be cleaned (within the waste decontamination enclosure), double bagged, appropriately labeled with a generator label, and transported to the waste dumpster, trailer, or other waste receptacle.
- 4. The Contractor shall not allow asbestos-containing debris and/or waste to accumulate within the work area(s). Visible dust and debris shall be wet wiped with amended water and HEPA vacuumed during abatement activities to minimize potential fiber release.
- 5. Waste bag transfer shall take place inside a cart (or other transportation device) that has been lined with two (2) layers of six (6) mil polyethylene sheeting. The transportation device must also be covered by polyethylene sheeting during any waste transfer activities and be labeled with an approved asbestos danger sign.



6. Personal Protective Equipment (PPE) will be required during asbestos abatement activities, cleaning, and during any other work area activities which could potentially disturb asbestos-containing materials until final air clearance criteria have been achieved.

Removal Operations

After all work area isolation procedures have been satisfactorily performed, and the pre-removal inspection approved by the Project Monitor, the Contractor shall begin asbestos abatement of the material. All work methods utilized shall be in compliance with OSHA regulations (29 CFR 1926.1101) governing Class II activities.

Once the asbestos containing material or items attached to the asbestos containing material has been disturbed, all personnel shall access and egress through the decontamination area only (except for emergency situations). The following general procedures shall be adhered to when personnel are entering or exiting the work area:

- 1. All workers shall change work clothes at the designated change areas prior to the start of the day's work. The Contractor for the storage of the workers' clothes and personal belongings should provide lockers or other acceptable substitutes.
- 2. All workers and authorized visitors shall, each time they leave the work area: remove gross contamination from clothing before leaving the work area via HEPA vacuum; proceed to the single "pop up" unit and remove all clothing except respirators; still wearing respirator proceed to a second "pop up" unit where the exterior of the respirator is to be wiped clean prior to removal, just outside of the entrance to the pop up unit.
- 3. All disposable clothing, towels, and other asbestos contaminated materials shall be disposed of as asbestos contaminated materials.
- 4. These procedures shall be adhered to whenever the workers exit the work area, including breaks, lunch, end of day, or being called out of area.
- 5. Water in basins or spray bottles, towels, soap, and hygiene conditions shall be the responsibility of the Contractor.
- 6. All footwear shall remain inside the work area until the completion of the project, and then only plastic or rubber footwear thoroughly cleaned shall be removed. All other footwear shall be disposed of as asbestos containing waste.
- 7. Only equipment necessary for the asbestos abatement operations shall be allowed in the work area and should therefore not be allowed to be taken into the decontamination unit.

Once the asbestos-containing materials have been removed, all generated waste will be placed into 6mil polyethylene bags. **Note:** All materials that are brought into the work area must be either decontaminated or disposed of as asbestos waste. All bags will be sealed by goose necking and wrapped with duct tape. Prior to leaving the regulated work area, asbestos-containing waste will be placed in a second bag and goose-necked (both the inner bag and outer bag separately, sealed, labeled, and placed in an appropriate asbestos shipping container. **Note:** All asbestos shipping containers will be sealed and secured at the end of each work shift.



Once the Contractor has removed all visible asbestos-containing materials, and is ready for final cleanup, the Project Monitor shall hold a post removal work inspection. This inspection shall determine whether all materials have been removed and the area sufficiently cleaned prior to proceeding with the next activity. The Contractor shall remedy any deficiency prior to beginning the final cleanup operations.

ACM Storage, Transportation, and Disposal (All Forms):

Only regulated asbestos waste that has been properly encapsulated/containerized, deemed to be adequately wet per United States Environmental Protection Agency (US EPA) definition, shall be transported from the point of generation. Transportation of regulated asbestos waste will be in conformance with the United States Department of Transportation (US DOT) Regulations 49 CFR Part(s) 172 and 173, United States Environmental Protection Agency (US EPA) NESHAPs Regulations 40 CFR Part 61, and all applicable Commonwealth of Virginia laws and regulations.

- 1. Bags, drums, or other acceptable packaging materials used for the transport of regulated asbestos-containing waste shall be labeled as asbestos-containing and have affixed upon it a waste generator tag/label.
- 2. Two (2) six (6) mil polyethylene bags or sheeting shall be utilized for the disposal of all asbestoscontaining wastes generated as part of the asbestos abatement process.
- 3. The interior of lined dumpster and/or box truck will be lined with two (2) layers of six (6) mil polyethylene sheeting. The exterior of the container will be placarded and identified as containing asbestos materials.
- 4. The asbestos-containing waste will only be hauled by permitted waste haulers that have been trained to identify the presence of asbestos if a spill occurs during transport to the landfill. Waste vehicles used for the transport of asbestos shall bear all appropriate licenses, labels and/or placards in accordance with US DOT requirements. Waste vehicle drivers must have at a minimum two (2) hour OSHA asbestos-awareness training prior to transporting asbestos waste from the site.
- 5. All waste shall be sent to an approved, Virginia Department of Environmental Quality (VA DEQ) licensed landfill, that accepts friable asbestos-containing waste. Waste manifests shall accompany all waste that leaves the project location. In addition, copies of the waste manifests shall be submitted to the Owner within seventy-two (72) hours of leaving site, illustrating delivery to the waste facility/landfill.
- 6. A daily count of waste bags and/or wrapped window units shall be calculated by the Asbestos Abatement Supervisor. This count shall be given daily to the onsite Project Monitor.

Inspections / Project Monitoring:

Inspections:

The Contractor shall not interfere, impede, or delay any inspections by the Owner's designated representative(s), the Project Monitor, and/or State, Federal, or Local Inspectors.

OSHA Personal Monitoring:

Personnel will be provided with OSHA required personnel monitoring devices to be paid for by the employing contractor and not the owner of the facility; one (1) worker for every four (4) workers inside the regulated work area shall don a personal monitoring pump. The personal monitoring samples shall be collected and analyzed daily. The air sample results shall be posted on-site within twenty-four (24)



hours of collection. At a minimum one (1) 30-minute excursion limit (EL) shall be run at the height of abatement activities daily. At a minimum (one) 8-hour sample shall be run to establish the 8-hour Time Weighted Average (TWA). NIOSH method 7400 analysis for Phase Contrast Microscopy (PCM) shall be utilized by the laboratory to determine the presence of potential fibers.

Area environmental monitoring samples shall be provided by a third-party monitoring firm (detailed below).


Third-Party Project Monitoring and Air Sampling:

The onsite Project Monitor / Air Sampling Technician will be responsible for the following:

- Visual inspections of abatement work area preparation completion, asbestos abatement completion, and cleanliness in accordance with American Society for Testing and Materials (ASTM) Standard Practice E1368-14 Standard Practice for Visual Inspection of Asbestos Abatement.
- 2. Conducting daily work-in-progress (WIP) environmental air sampling during the asbestos abatement process to ensure asbestos fibers are not entering the structure or leaving the designated work area(s).
- 3. Providing daily Contractor oversight to ensure Contractor compliance with the laws and regulations governing asbestos abatement procedures in the Commonwealth of Virginia, in accordance with this specification.


The Project Monitor has the authority to stop the Contractor's work, if in their judgment, there is a risk to the health & safety of building occupants, abatement workers and/or the environment due to the Contractor's actions and/or the Contractor is not following the contractual design specifications and all applicable laws. Work shall only be permitted to commence if allowed by the Owner, or their environmental consultant and corrective actions have taken place. The Contractor acknowledges that it is their responsibility to follow all applicable laws pertaining to asbestos abatement and the job specifications, and failure to do so may result in lost time and/or dismissal from the site at no cost to the Owner or their environmental consultant. The Contractor shall not be compensated for any lost time, labor, materials, etc., due to inappropriate actions.

Virginia Department of Professional and Occupational Regulation (VA DPOR) Asbestos Project Designer License(s)

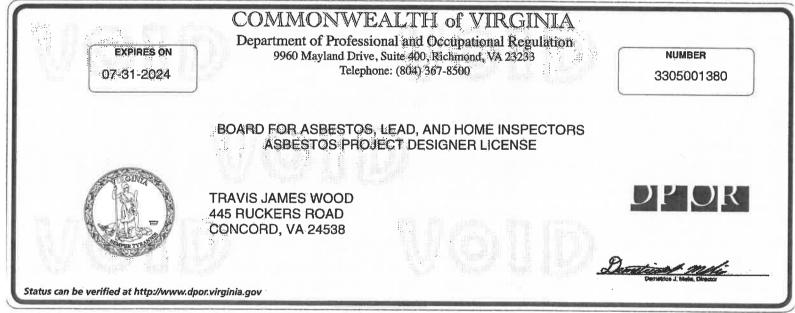

(SEE REVERSE SIDE FOR PRIVILEGES AND INSTRUCTIONS)

DPOR-LIC (02/2017)

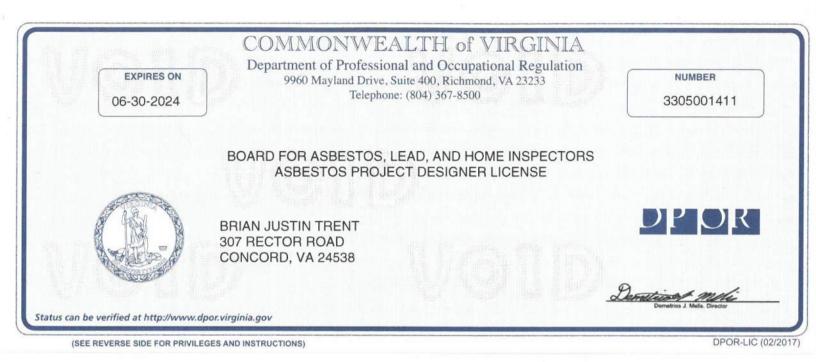

Roofing System Asbestos-Containing Material Inspection, performed by Hurt & Proffitt, dated March 19, 2024



March 19, 2024

Mr. Charles Santore, Clerk of the Works Bedford County Public Schools 310 South Bridge Street Bedford, Virginia 24523

Via Email

Re: Roofing System Asbestos-Containing Material Inspection Huddleston Elementary School 1027 Huddleston Drive; Huddleston, Virginia 24104 Hurt & Proffitt Project: 20240358

Mr. Santore:

The employee-owners of Hurt & Proffitt, Inc. (H&P) are pleased to provide this document and enclosures as the *Asbestos-Containing Material Inspection Report* associated with the roofing system(s) located upon the *Huddleston Elementary School* at 1027 Huddleston Drive in Huddleston, Virginia 24104.

1.0 Asbestos-Containing Material (ACM) Survey and Laboratory Procedures

Inspection / assessment activities were performed in compliance with United States Occupational Safety and Health Administration (US OSHA) and United States Environmental Protection Agency (US EPA) National Emission Standards for Hazardous Air Pollutants (NESHAPs) on March 7, 2024, by Hurt & Proffitt representatives, Mr. Brian J. Trent (Virginia Asbestos Inspector: 3303003533) and Mr. Travis J. Wood (Virginia Asbestos Inspector: 3303004688). Copies of Mr. Trent's and Mr. Wood's Virginia Department of Professional and Occupational Regulation (VA DPOR) Asbestos Inspector License(s) are enclosed for your review.

Physical inspection/assessment activities were performed throughout the entirety of the roofing system associated with the above referenced facility to determine the extent and locations of suspect asbestos-containing materials and potential degree of abatement activities to take place for the proposed roof replacement. **Note:** Bulk material sample collection efforts were limited to those materials which were readily and safely accessible and which could be sampled without damaging existing systems/structures.

Suspect bulk samples were collected and logged on chain-of-custody forms as representative of suspect homogenous materials (based on material type, color, texture, etc.), from the functional spaces as they were determined by visual observations in the field.

Twenty-nine (29) suspect asbestos-containing bulk material samples, including triplicate sets, were submitted for analysis by EPA Method No. 600/R-93/116 and 600/M4-82-020 (polarized light microscopy (PLM)). All samples were analyzed by SanAir Technologies Laboratory of North Chesterfield, Virginia, a NVLAP accredited laboratory licensed to perform asbestos bulk analysis within the State of Virginia under positive stop protocol. Under microscopy, an additional ten (10) material layers were identified; therefore, a total of thirty-nine (39) analyses were conducted to complete this report.



The following materials were identified to be **asbestos-containing**:

- Black Roof Flashing Material Brick Wall System(s), Parapet Wall System(s)
- Black Wall Sealant (Roofing Cement Debris) Brick Wall System
- Black Parapet Wall Sealant Parapet Wall System(s)
- Black Chimney Flashing Chimney Unit, Annex Building

The following table (Table I) illustrates the sample identification, location, and analytical results as received from the laboratory. A copy of the laboratory results and sample chain-of-custody are additionally enclosed for your review.

Sample No.	Material Description/	Location	Estimated Quantity	Lab Results (% Asbestos)	Condition/ Friable Y/N			
004-RFFLSH-ABC	BLACK ROOF FLASHING MATERIAL	BRICK WALL SYSTEM(S), PARAPET WALL SYSTEM(S)	+/- 450 SF	30% CHRYSOTILE	FAIR / N			
006-WLSEAL-A	BLACK WALL SEALANT (ROOFING CEMENT DEBRIS)	BRICK WALL SYSTEM	+/- 60 SF	3% CHRYSOTILE	DAMAGED / N			
010-PWS-AB	BLACK PARAPET WALL SEALANT	PARAPET WALL SYSTEM(S)	+/- 70 SF	8% CHRYSOTILE	DAMAGED / N			
012-CHFLSH-A	BLACK CHIMNEY FLASHING	CHIMNEY UNIT, ANNEX BUILDING	+/- 7 SF	8% CHRYSOTILE	FAIR / N			
INTENTIONALLY LEFT BLANK								
001-RFSS-ABC	BLACK EPDM ROOFING SYSTEM SEAM SEALANT	ROOFING SYSTEM, MAIN FIELD	N/A	NONE DETECTED	N/A			
002-RFCORE- ABCDE	EPDM ROOFING SYSTEM CORE (LAYERED)	ROOFING SYSTEM, MAIN FIELD	N/A	NONE DETECTED	N/A			
003-CHFLSH-AB	TAN CHIMNEY FLASHING	CHIMNEY UNIT	N/A	NONE DETECTED	N/A			
005-RFFLSH-ABC	BLACK AND RED ROOF FLASHING CAULK (METAL STRIP SEALANT)	ROOFING SYSTEM, ROOF FLASHING(S)	N/A	NONE DETECTED	N/A			
007-RFCORE-A	ROOFING SYSTEM CORE (LAYERED)	ROOFING SYSTEM, BREEZEWAY	N/A	NONE DETECTED	N/A			
008-CCS-AB	BLACK COPING CAP SEALANT	ROOFING SEALANT, PARAPET WALL(S)	N/A	NONE DETECTED	N/A			
009-RFP-ABC	ROOF PAINT (VARIOUS)	ROOFING SYSTEM, METAL SURFACE(S)	N/A	NONE DETECTED	N/A			
011-RFCORE-AB	ROOFING SYSTEM CORE (LAYERED)	ROOFING SYSTEM, ANNEX BUILDING	N/A	NONE DETECTED	N/A			
013-RFCLK-A	BLACK ROOF FLASHING CAULK	ROOFING SYSTEM, ANNEX BUILDING	N/A	NONE DETECTED	N/A			

Table I Asbestos-Containing Bulk Material Sample Analysis Summary Huddleston Elementary School Roofing System(s)



Table Notes:

- 1. (ABC) following sample identification denotes multiple samples collected of the same homogenous material from various functional spaces of the structure.
- 2. Sample Analysis was performed under "Positive Stop" protocol, i.e.: the laboratory analyzed multiple samples of similar material and stopped analysis when asbestos fibers were identified.
- 3. Contractor is responsible for field verification of quantities and locations of asbestos-containing materials and presumed asbestos-containing materials referenced throughout this report.

A copy of the laboratory report of analysis, along with drawing(s) illustrating sample collection location(s) and identified asbestos-containing material locations, are enclosed for your review.

Discussion and Recommendations

In order to obtain a building permit, this report must accompany the application to the county, town and/or city for which the work is to take place. It is the responsibility of the contractor performing the abatement and/or building renovation or demolition activities that the proper permits are obtained and notifications for each type of activity be performed as required by state and federal guidelines.

Local, state, and federal law requires regulated asbestos-containing materials (RACM) to be removed prior to renovation and/or demolition. The definition of RACM as defined by the US EPA NESHAPs as follows:

"Regulated Asbestos-Containing Material" (RACM) is (a) friable asbestos material, (b) Category I nonfriable ACM that has become friable, (c) Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting or abrading, or (d) Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of demolition or renovation operations.

Hurt & Proffitt recommends the following asbestos-containing materials be removed prior to proposed roofing system replacement activities that may damage the materials and subsequently cause fiber release:

- Category I Non-Friable Black Roof Flashing Material Brick Wall System(s), Parapet Wall System(s)
- Category I Non-Friable Black Wall Sealant (Roofing Cement Debris) Brick Wall System
- Category I Non-Friable Black Parapet Wall Sealant Parapet Wall System(s)
- Category I Non-Friable Black Chimney Flashing Chimney Unit, Annex Building

Note: Based upon our experience, we recommend that all asbestos-containing materials (ACM) be removed prior to renovation activities, due to the fact that disturbance can damage the materials, create potential exposure to workers and occupants, and additionally make the materials friable. This recommendation is made as a best management practice (BMP) to reduce potential exposure and limit liability.



It is *required* that a Virginia Department of Professional and Occupational Regulation (VA DPOR) licensed asbestos abatement contractor perform the removal of each of the asbestos-containing materials described within this report. *Further*, the Virginia Department of Labor and Industry (VA DOLI) *Asbestos Notification and Permit Program* regulations require written notification by licensed asbestos abatement contractors for any asbestos abatement project that is at least ten (10) linear feet (LF) or ten (10) square feet (SF); notification is not required for non-friable asbestos-containing roofing, flooring, or siding materials which when installed, encapsulated, or removed do not become friable. The asbestos abatement contractor or facility owner must submit an *Asbestos Notification of Demolition and Renovation Form* to the VA DOLI along with the appropriate fees within at least twenty (20) calendar days prior to the scheduled asbestos removal activity or renovation start date by certified mail or hand delivery. Notifications should be sent to the following:

Asbestos Program Virginia Department of Labor and Industry Powers-Taylor Building 13 South Thirteenth Street Richmond, Virginia 23219

Additionally, the United States Environmental Protection Agency (US EPA) must be notified for any asbestos projects that are at least one-hundred and sixty (160) square or two-hundred and sixty (260) linear feet and for all demolition projects (removal of load-bearing structural components), regardless of whether asbestos-containing materials are present in the structure or facility. Notifications required by the US EPA must be sent to the Department as described above, except the notification period is ten (10) working days. NESHAP required notifications must be mailed to the US EPA at the following address:

Asbestos Coordinator US EPA Region III Mail Code 3LC62 1650 Arch Street Philadelphia, Pennsylvania 19103

Hurt & Proffitt can perform the *required* third-party asbestos project monitoring, which will help maintain the integrity of the abatement process, solidify that the abatement process has been completed correctly, through final visual clearance inspection(s) and final air clearance sampling in compliance with NIOSH 7400 Phase Contrast Microscopy (PCM) methodologies. As third-party monitor, we will reduce the liability for which the Client and/or the Contractor may incur if there should happen to be a violation determined by state and/or federal code enforcement personnel that may visit the site during the removal/abatement process.

Our recommendations are based on the guidelines presented by the United States Occupational Safety and Health Administration (US OSHA), United States Environmental Protection Agency (US EPA), and the Commonwealth of Virginia. Any conditions discovered which deviate from the data contained in this report should be presented to us for our evaluation.



Note: During the process of this inspection/assessment, bulk material sampling was limited to those materials which were within the areas designed by the Client, which were safely accessible, and which were able to be sampled without damaging systems and/or structures (as requested by Client). As such, additional asbestos-containing materials (ACM) or presumed asbestos-containing materials (PACM) may exist, either undetected and/or inaccessible) within other areas of the structure. If additional suspect materials are discovered during either the asbestos-containing material abatement or renovation activities, all work on the site must stop and the newly identified material(s) sampled by a Virginia licensed asbestos inspector and evaluated for asbestos content.

2.0 Limitations

This report summarizes the results of Hurt & Proffitt's *Asbestos-Containing Material Inspection* located at the above referenced project based upon our understanding of the requested scope of services. The findings prepared by Hurt & Proffitt are based upon our observations and the analytical analysis of the suspect bulk samples collected at the time of our field inspection. The services performed were provided in accordance with generally accepted environmental industry standard practices. No warranty, expressed or implied, are made. Our observations, conclusions, and recommendations are based upon conditions readily visible at the time of our field inspection, the results of analytical testing, and information provided to us by others.

Our conclusions and recommendations are based upon the guidelines presented to us by the United States Environmental Protection Agency (US EPA), United States Occupational Safety and Health Administration (US OSHA), and the Commonwealth of Virginia. Any conditions which deviate from the data contained within this report should be presented to Hurt & Proffitt for our evaluation and comment.

During Hurt & Proffitt's non-invasive inspection, accessible areas were visually surveyed for the presence of suspect asbestos-containing materials. Locations and areas reviewed were limited to those identified by the Client and those that could be readily and safely accessed. Our conclusions and recommendations are based on the results of our sampling and analysis activities and cannot be used to form a professional opinion of conditions in others area beyond those from which the bulk material samples were collected. It is possible that inaccessible areas, such as behind walls or above ceilings, may not have been surveyed and therefore, conditions in these areas are unknown.

During this inspection, suspect asbestos-containing material samples were submitted for analysis at an NVLAP-accredited laboratory via polarized light microscopy (PLM). With any similar survey of this nature, actual conditions exist only at the precise locations from which the bulk material samples were collected. Certain inferences are based on the results of this sampling and related testing to form a professional opinion of conditions in areas beyond those from which the samples were collected.

Hurt & Proffitt assumes no responsibility regarding response actions initiated as a result of our findings, nor liability for the duties and responsibilities of the Client or Building Owner with respect to compliance with applicable regulations. Compliance with local, state, and/or federal requirements / regulations are the responsibility of the Client or Building Owner.



3.0 Closing

Thank you for allowing Hurt & Proffitt the opportunity to be of service to you. Should you have any questions and/or concerns, please do not hesitate to contact the undersigned via email or by telephone at 434.847.7796.

Respectfully, Hurt & Proffitt, Inc.

btrent@handp.com

Environmental Project Manager


W.C

W. Chris Nixon, Vice President Director of Environmental Services <u>cnixon@handp.com</u>

Enclosures:


Brian J. Trent

Asbestos Inspector License(s) Laboratory Report of Analysis – Suspect Bulk Material Samples Sample Collection Location Drawing(s) Project Drawing(s)

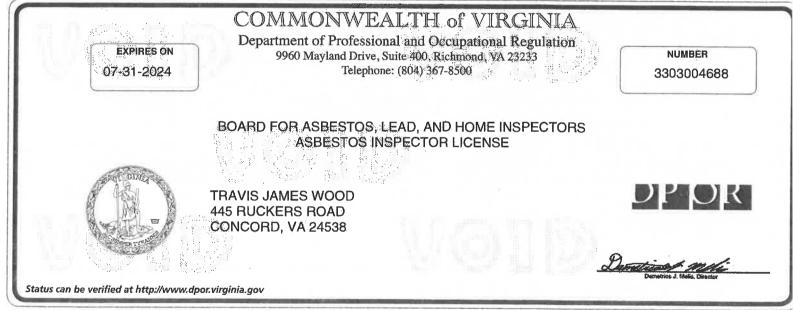

(SEE REVERSE SIDE FOR PRIVILEGES AND INSTRUCTIONS)

DPOR-LIC (02/2017)

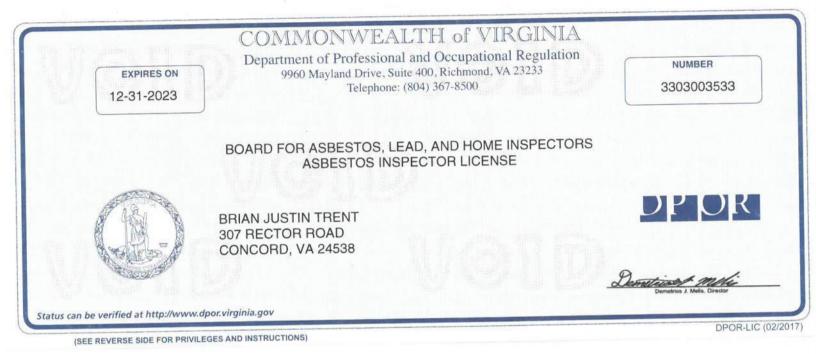



The Identification Specialists

Analysis Report prepared for Hurt & Proffitt, Inc.

Report Date: 3/15/2024 Project Name: Huddleston Elementary Project #: 20240358 SanAir ID#: 24013940



NVLAP LAB CODE 200870-0





SanAir ID Number 24013940 FINAL REPORT 3/15/2024 3:22:13 PM

Project Number: 20240358 P.O. Number: 20250258 Project Name: Huddleston Elementary Collected Date: 3/7/2024 Received Date: 3/8/2024 10:20:00 AM

Dear Brian Trent,

We at SanAir would like to thank you for the work you recently submitted. The 29 sample(s) were received on Friday, March 08, 2024 via UPS. The final report(s) is enclosed for the following sample(s): 001-RFSS-A, 001-RFSS-B, 001-RFSS-C, 002-RFCORE-A, 002-RFCORE-B, 002-RFCORE-C, 002-RFCORE-D, 002-RFCORE-E, 003-CHFLSH-A, 003-CHFLSH-B, 004-RFFLSH-B, 004-RFFLSH-C, 005-RFFLSH-A, 005-RFFLSH-B, 005-RFFLSH-C, 006-WLSEAL-A, 007-RFCORE-A, 008-CCS-A, 008-CCS-B, 009-RFP-A, 009-RFP-B, 009-RFP-C, 010-PWS-A, 010-PWS-B, 011-RFCORE-A, 011-RFCORE-B, 012-CHFLSH-A, 013-RFCLK-A.

These results only pertain to this job and should not be used in the interpretation of any other job. This report is only complete in its entirety. Refer to the listing below of the pages included in a complete final report.

Sincerely,

Sandra Asbiint

Sandra Sobrino Asbestos & Materials Laboratory Manager SanAir Technologies Laboratory

Final Report Includes:

- Cover Letter
- Analysis Pages
- Disclaimers and Additional Information

Sample conditions:

- 29 samples in Good condition.



SanAir ID Number 24013940 FINAL REPORT 3/15/2024 3:22:13 PM

Project Number: 20240358 P.O. Number: 20250258 Project Name: Huddleston Elementary Collected Date: 3/7/2024 Received Date: 3/8/2024 10:20:00 AM

Analyst: Moore, Brandi

Asbestos Bulk PLM EPA 600/R-93/116

	Stereoscopic	Com	ponents	
SanAir ID / Description	Appearance	% Fibrous	% Non-fibrous	Asbestos Fibers
001-RFSS-A / 24013940-001 EPDM Roofing Sealant	Black Non-Fibrous Homogeneous		100% Other	None Detected
001-RFSS-B / 24013940-002 EPDM Roofing Sealant	Black Non-Fibrous Homogeneous		100% Other	None Detected
001-RFSS-C / 24013940-003 EPDM Roofing Sealant	Black Non-Fibrous Homogeneous		100% Other	None Detected
002-RFCORE-A / 24013940-004 EPDM Roofing System Core (Layered), Felt	Black Fibrous Homogeneous	80% Cellulose 15% Glass	5% Other	None Detected
002-RFCORE-A / 24013940-004 EPDM Roofing System Core (Layered), Foam	Yellow Non-Fibrous Homogeneous		100% Other	None Detected
002-RFCORE-B / 24013940-005 EPDM Roofing System Core (Layered), Felt	Black Fibrous Homogeneous	80% Cellulose 15% Glass	5% Other	None Detected
002-RFCORE-B / 24013940-005 EPDM Roofing System Core (Layered), Foam	Yellow Non-Fibrous Homogeneous		100% Other	None Detected
002-RFCORE-C / 24013940-006 EPDM Roofing System Core (Layered), Felt	Black Fibrous Homogeneous	80% Cellulose 15% Glass	5% Other	None Detected
002-RFCORE-C / 24013940-006 EPDM Roofing System Core (Layered), Foam	Yellow Non-Fibrous Homogeneous		100% Other	None Detected
002-RFCORE-D / 24013940-007 EPDM Roofing System Core (Layered), Felt	Black Fibrous Homogeneous	80% Cellulose 15% Glass	5% Other	None Detected

Analyst: Brand Moore

Approved Signatory:

Johnston Wlan

Analysis Date:

3/15/2024



SanAir ID Number 24013940 FINAL REPORT 3/15/2024 3:22:13 PM

Project Number: 20240358 P.O. Number: 20250258 Project Name: Huddleston Elementary Collected Date: 3/7/2024 Received Date: 3/8/2024 10:20:00 AM

Analyst: Moore, Brandi

Asbestos Bulk PLM EPA 600/R-93/116

Stereoscopic		Com	ponents	
anAir ID / Description	Appearance	% Fibrous	% Non-fibrous	Asbestos Fibers
002-RFCORE-D / 24013940-007 EPDM Roofing System Core (Layered), Foam	Yellow Non-Fibrous Homogeneous		100% Other	None Detected
002-RFCORE-E / 24013940-008 EPDM Roofing System Core (Layered), Felt	Black Fibrous Homogeneous	80% Cellulose 15% Glass	5% Other	None Detected
002-RFCORE-E / 24013940-008 EPDM Roofing System Core (Layered), Foam	Yellow Non-Fibrous Homogeneous		100% Other	None Detected
003-CHFLSH-A / 24013940-009 Chimney Flashing	Tan Non-Fibrous Heterogeneous		100% Other	None Detected
003-CHFLSH-B / 24013940-010 Chimney Flashing	Tan Non-Fibrous Heterogeneous		100% Other	None Detected
004-RFFLSH-A / 24013940-011 Roof Flashing Material (On Brick)	Black Non-Fibrous Heterogeneous		70% Other	30% Chrysotile
004-RFFLSH-B / 24013940-012 Roof Flashing Material (On Brick)				Not Analyzed
004-RFFLSH-C / 24013940-013 Roof Flashing Material (On Brick)				Not Analyzed
005-RFFLSH-A / 24013940-014 Roof Flashing Caulk (On Metal) (Layered), Caulk	Black Non-Fibrous Homogeneous		100% Other	None Detected
005-RFFLSH-A / 24013940-014	Red Non-Fibrous		100% Other	None Detected

Analysis Date:

3/15/2024



SanAir ID Number 24013940 FINAL REPORT 3/15/2024 3:22:13 PM

Project Number: 20240358 P.O. Number: 20250258 Project Name: Huddleston Elementary Collected Date: 3/7/2024 Received Date: 3/8/2024 10:20:00 AM

Analyst: Moore, Brandi

Asbestos Bulk PLM EPA 600/R-93/116

	Stereoscopic Com		Components		
SanAir ID / Description	Appearance	% Fibrous	% Non-fibrous	Asbestos Fibers	
005-RFFLSH-B / 24013940-015 Roof Flashing Caulk (On Metal) (Layered), Caulk	Black Non-Fibrous Homogeneous		100% Other	None Detected	
005-RFFLSH-B / 24013940-015 Roof Flashing Caulk (On Metal) (Layered), Caulk	Red Non-Fibrous Homogeneous		100% Other	None Detected	
005-RFFLSH-C / 24013940-016 Roof Flashing Caulk (On Metal) (Layered), Caulk	Black Non-Fibrous Homogeneous		100% Other	None Detected	
005-RFFLSH-C / 24013940-016 Roof Flashing Caulk (On Metal) (Layered), Caulk	Red Non-Fibrous Homogeneous		100% Other	None Detected	
006-WLSEAL-A / 24013940-017 Wall Sealant	Black Non-Fibrous Heterogeneous		97% Other	3% Chrysotile	
007-RFCORE-A / 24013940-018 Roof Core W/ Gypsum Insulation (Layered), Breezeway, Felt	Black Fibrous Homogeneous	80% Cellulose 15% Glass	5% Other	None Detected	
007-RFCORE-A / 24013940-018 Roof Core W/ Gypsum Insulation (Layered), Breezeway, Foam	Yellow Non-Fibrous Homogeneous		100% Other	None Detected	
007-RFCORE-A / 24013940-018 Roof Core W/ Gypsum Insulation (Layered), Breezeway, Gypsum	White Non-Fibrous Homogeneous		100% Other	None Detected	
008-CCS-A / 24013940-019 Coping Cap Sealant	Black Non-Fibrous Homogeneous		100% Other	None Detected	
008-CCS-B / 24013940-020 Coping Cap Sealant	Black Non-Fibrous Homogeneous		100% Other	None Detected	

Analyst: Deaved Moore

Approved Signatory:

Johnston Wlan

Analysis Date:

3/15/2024



SanAir ID Number 24013940 FINAL REPORT 3/15/2024 3:22:13 PM

Project Number: 20240358 P.O. Number: 20250258 Project Name: Huddleston Elementary Collected Date: 3/7/2024 Received Date: 3/8/2024 10:20:00 AM

Analyst: Moore, Brandi

Asbestos Bulk PLM EPA 600/R-93/116

	Stereoscopic Components		oonents			
SanAir ID / Description	Appearance	% Fibrous	% Non-fibrous	Asbestos Fibers		
009-RFP-A / 24013940-021 Roof Paint (Metal Roof Systems)	Various Non-Fibrous Heterogeneous		100% Other	None Detected		
009-RFP-B / 24013940-022 Roof Paint (Metal Roof Systems)	Various Non-Fibrous Heterogeneous		100% Other	None Detected		
009-RFP-C / 24013940-023 Roof Paint (Metal Roof Systems)	Various Non-Fibrous Heterogeneous		100% Other	None Detected		
010-PWS-A / 24013940-024 Parapet Wall Sealant	Black Non-Fibrous Heterogeneous		92% Other	8% Chrysotile		
010-PWS-B / 24013940-025 Parapet Wall Sealant				Not Analyzed		
011-RFCORE-A / 24013940-026 Roof Core (Layered)/Annex Bldg, Felt	Black Fibrous Homogeneous	80% Cellulose 15% Glass	5% Other	None Detected		
011-RFCORE-A / 24013940-026 Roof Core (Layered)/Annex Bldg, Foam	Yellow Non-Fibrous Homogeneous		100% Other	None Detected		
011-RFCORE-B / 24013940-027 Roof Core (Layered)/Annex Bldg, Membrane	Black Non-Fibrous Homogeneous		100% Other	None Detected		
011-RFCORE-B / 24013940-027 Roof Core (Layered)/Annex Bldg, Felt	Black Fibrous Homogeneous	80% Cellulose 15% Glass	5% Other	None Detected		
011-RFCORE-B / 24013940-027 Roof Core (Layered)/Annex Bldg,	Yellow Non-Fibrous Homogeneous		100% Other	None Detected		

Analyst: Dravel Moore

Approved Signatory:

Johnston Wisa

Analysis Date:

3/15/2024



SanAir ID Number 24013940 FINAL REPORT 3/15/2024 3:22:13 PM

Project Number: 20240358 P.O. Number: 20250258 Project Name: Huddleston Elementary Collected Date: 3/7/2024 Received Date: 3/8/2024 10:20:00 AM

Analyst: Moore, Brandi

Asbestos Bulk PLM EPA 600/R-93/116

	Stereoscopic	Com	ponents	
SanAir ID / Description	Appearance	% Fibrous	% Non-fibrous	Asbestos Fibers
012-CHFLSH-A / 24013940-028 Chimney Flashing/Annex Bldg	Black Non-Fibrous Heterogeneous		92% Other	8% Chrysotile
013-RFCLK-A / 24013940-029 Roof Flashing Caulk	Black Non-Fibrous Homogeneous		100% Other	None Detected
Analyst: Bran	d'Moore	Approvec	Signatory:	
Analysis Date: 3/15/20)24		Date: 3/15	5/2024

Disclaimer

This report is the sole property of the client named on the SanAir Technologies Laboratory chainof-custody (COC). Results in the report are confidential information intended only for the use by the customer listed on the COC. Neither results nor reports will be discussed with or released to any third party without our client's written permission. The final report shall not be reproduced except in full without written approval of the laboratory to assure that parts of the report are not taken out of context. This report and any information contained within shall not be edited, altered, or modified in any way by any persons or agencies receiving, viewing, distributing, or otherwise possessing a copy of this final report. The laboratory reserves the right to perform amendments to any finalized report, of which shall supersede and make obsolete any previous editions. Such changes, modifications, additions, or deletions shall be effective immediately upon notice thereof, which may be given by means including but not limited to posting on the SanAir client portal website, electronic or conventional mail, or by any other means. The information provided in this report applies only to the samples submitted and is relevant only for the date, time, and location of sampling. The accuracy of the results is dependent upon the client's sampling procedure and information provided to the laboratory by the client on the COC. SanAir assumes no responsibility for the sampling procedure and will provide evaluation reports based solely on the sample(s) in the condition in which they arrived at the laboratory and information provided by the client on the COC, such as: project number, project name, collection dates, po number, special instructions, samples collected by, sample numbers, sample identifications, sample type, selected analysis type, flow rate, total volume or area, and start stop times that may affect the validity of the results in this report. Samples were received in good condition unless otherwise noted on the report. SanAir assumes no responsibility or liability for the manner in which the results are used or interpreted. This report does not constitute nor shall not be used by the client to claim product, process, system, or person certification, approval, or endorsement by NVLAP, NIST, NELAC. AIHA LAP, LLC or any other U.S. governmental agencies and may not be accredited by every local, state, and federal regulatory agencies. Samples are held for a period of 60 days. Fibers smaller than 5 microns cannot be seen with this method due to scope limitations. For NY state samples, method EPA 600/M4-82-020 is performed.

NYELAP Disclaimer:

Polarized- light microscopy is not consistently reliable in detecting asbestos in floor covering and similar non-friable organically bound materials. Quantitative transmission electron microscopy is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos containing.

Asbestos Accreditations

National Voluntary Laboratory Accreditation Program (NVLAP) Lab Code 200870-0 City of Philadelphia Department of Public Health Air Management Services, Certification#ALL-460 Commonwealth of Pennsylvania Department of Environmental Protection Number 68-05397 California State Environmental Laboratory Accreditation Program Certificate Number 2915 Colorado Department of Public Health and Environment Registration Number AL-23143 Connecticut Department of Public Health Environmental Laboratory Registration Number PH-0105 Massachusetts Department of Labor Standards Asbestos Analytical Services License Number: AA000222

State of Maine Department of Environmental Protection License Number: LB-0075, LA-0084 New York State Department of Health Laboratory ID: 11983

State of Rhode Island Department of Health Certification No.: PCM00126, PLM00126, TEM00126 Texas Department of State Health Services License Number: 300440

Commonwealth of Virginia Department of Professional and Occupational Regulation Number: 3333000323

State of Washington Department of Ecology Laboratory ID: C989

State of West Virginia Bureau for Public Health Analytical Laboratory Number: LT000616 Vermont Department of Health License Number: Asb-Co-An-000006

Louisiana Department of Environmental Quality AI Number 212253, Certificate #05088

S	SanA mologies Labora	Fax 804.	field, V 171 /7 88 8907070	ite 100 A 23236 8.895.1177	Chair	estos n ofisi 10, Rev 5	ody 1/4/2022	2	SanAir ID N	iumber 1399
Company	Hurt& Proff	itt Inc.			Project #: 2024	40359	3	Coffected by	BTRENT	IT. WOOD
	2524 Langho				UDDLESTON	1.1.1.			34.847.779	
		g Virginia 2450		Date Collecte			LIGHTET	Fax	101 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
and the second s	ollection: VA	0		Spatial Contracts	2 240358			h	voode he	dp.com
but or e	Bulk	Accounty.	1	Air			1.	So	il	
ABB	PLM EPA 60	0/R-93/116		in the stand	IIOSH00		ABS	E PLN	A EPA 600/R	-93/116 (Qual.)
	Positivesto	pp X	ABA-2						rmiculite &	
ABEPA			ABTE		and the second state		ABS	100	A CARB 435	
ABB1K			ABAT	N TEM NIO	SH 7402		ABS	P1 PLN	A CARB 435	(LOD 0.25%)
ABBEN	EN PLM EPA NOB** AB		ABT2	TEM L	evel II		ABS	P2 PLN	A CARELOD	01%).
ABBCH	TEM Chatfie	ld**	Oth	er:				D	ust	1. C.
ABBTM	TEM EPA N	OB**		New York	ELAP		ABWA	TEM Wip	e ASTM D-64	480
ABQ	PLM Qualitativ	/e	ABEPA	the second se			ABDMV	TEM Mi	MERGIN	D-5755
**	Available on 24	4-hr. to 5-dayA T	ABEN	Y NY EL	AP 198.6NPIN	0B	10.00	가장하네	28 - 1892 M.D. 199	and the second
	Water		ABBN	Y NY ELAP	198.4 TEM NO	B	Matrix	0	her	
ABHE	EPA 100.2	1							n da servicio La composición de la c	
T	urnAro und	BID (4 LID	TEM) [1	12 HR		1	Day 🗆
	Times	BHR (4 HR TEM) □ 2 aDs) HfR (8HR TEM) D3ys		-	Dayls		N	
14 14			ays	2	Days			(yis	1 9	Days
Special I	nstructions			·		Sec. 1		100 12		1.
S	ample #	Sam	ple Identif	icati/Locati	on	Volu or A	ime Samp Trea I	le Date	Flow Rate*	Start – St Time*
001-R	FSS-ABC	BLACK EPOM	ROOFTA	G SEALAN	U T	14	and the			1. J. 199
002 -RI	CORE ABCI	EPAM ROOFT	6 SYSTE	M CORE (AYERED)		See. 8	ar	-	
	E	CHIMNEY FLA				1. 4				1. 1. 1.
		BLACK ROOF F		MATERZA	1-					
		(ON BRICK)				1.12				
005 D	EEISH- ADA	ROOF FLASHI		V CONINE-		(* 1993) 1993			20 Ng 20 20	
103-K	LUB NEC	(LAYERED)		E LON ME		1				
DOIns La	LSEAL-A	BLACK WALL S				1				
and the second second	FCORE-A	ROOF CORE			107701			27 20		
JUL K	PCOLE-M	- 19 05	-		CHILLON	18.18			-	
		(LAYERED),	1		the second second	- 41° -	1	10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 -		121 12 12
1	CS -AB	COPING CAP			and the second		1.1.1	-		4 2 1 2
009-R	FP-ABC	ROOF PHINT	METAL	ROOF SYS	TEMS)	1	H 2174	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		-
Relinou	ished by	Date	X	Time	Receiv	ked	21-24	Date	1 100 151	Time

Date	Time	Received	Date	Time
03/07/2024	TO VPS	IRM	31824	room
	And the set of the set	100 - 100 100 100 100 100 100 100 100 10		
	03/07/2024			

If no technician is provided, then the primary contact for your account willsblected. Unlet eduled, the turnaround for all samplised after ES pm of the hr TA Ther a willbe logged inthe next business day. Weekend or holiday work must be scheduled ahead of time and is chargdont. imum charge of \$150. A courier charge will be applied for same day and one-day turnaround times for offsite work. SanAir covers Ground and Day Air shipping . Shipments billedto SanAir with faster shipping rate will result in additional charges. Page_1 Page 9 of 10

240 13940 Form 140, Revision 1, 1/20/2017

Sample #	Sample Identification/Location	Volume or Area	Sample Date	Fle Rat				
010-PNS-AB	BLACK PARAPET WALL SEALANT		and the second s					
111 - RFCORE-AB	ROOF CORE (LAY FRED) / ANNEX BU	pG.		-		19 - 1990 - 19 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 - 1990 -		
12 - CHFLSH-A	CHIMNEY FLASHING / ANNEX BLI							
013 - RFCLK - A	ROOF FLASHING CAULK				-			
				-	10		19 . Ye	
<u> </u>								
				-			Car and	
					10			
\sim						and the second	1997 - 19	
				1995 1996 1996				
<u>e e</u>				2 ⁴⁴⁴	-			
	\land		in the main	1.5				
/								
							•	
					100 A			
	ار این انجمع می می این این این این این این این این این ای			and the				
				-		-		
				101	-	1		
			- 100 - 100	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				
					1.16	March 1		
V**		1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.		1.000	12			
X				1.54	1997	1000 (1000) 1000 (1000)		
					14			
						and and a		
			an an sealainn Sealainn anns an sealainn	10				
يې بې د د بې ورسې ور الله د د د د د د ا			101 - 46 ⁰			900 - 200 		
				1 1				
		and a start of the	a na ha					
opecial Instructions					-	-		
Relinquished by	Date Time 03/07/2024 70 UPS	Received by	Date 3185	Date		Time 1020m		
A A	05/01/2004 10005							

Huddleston Elementary School 1027 Huddleston Drive; Huddleston, VA 24104 Hurt & Proffitt Project: 20240358

Suspect Asbestos-Containing Material Sample Collection Locations



